


Operator
Telephone
Fax
e-Mail

Room 1 / Summary

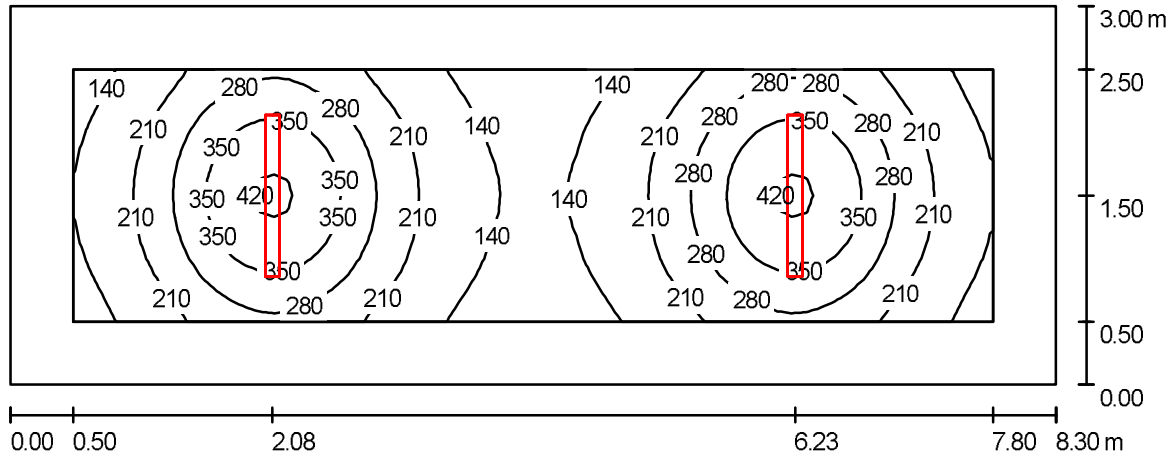

Height of Room: 2.300 m, Mounting Height: 2.300 m, Maintenance factor: 0.80 Values in Lux, Scale 1:60

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	237	115	432	0.486
Floor	20	158	86	238	0.544
Ceiling	70	61	34	485	0.548
Walls (4)	50	97	54	167	/

Workplane:
 Height: 0.750 m
 Grid: 64 x 16 Points
 Boundary Zone: 0.500 m
UGR Lengthways- Across to luminaire axis
 Left Wall 22 20
 Lower Wall 22 20
 (CIE, SHR = 1.00.)
 Illuminance Quotient (according to LG7): Walls / Working Plane: 0.415, Ceiling / Working Plane: 0.259.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ [lm]	P [W]
1	2	ENLIT s.r.o. SLIM3 JET LED 1200mm 3870lm 4000K (1.000)	3870	28.0
Total:			7740	56.0

Specific connected load: 2.25 W/m² = 0.95 W/m²/100 lx (Ground area: 24.90 m²)