


Operator
Telephone
Fax
e-Mail

Room 1 / Summary

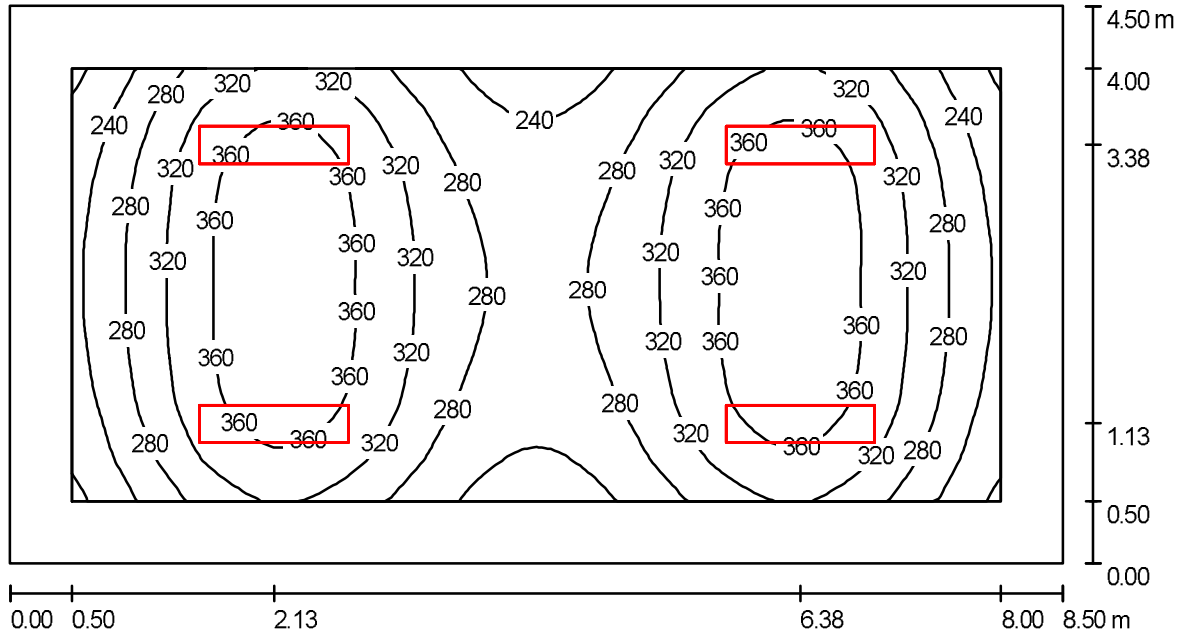

Height of Room: 3.400 m, Mounting Height: 3.400 m, Maintenance factor: 0.80

Values in Lux, Scale 1:61

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	309	194	388	0.627
Floor	10	243	138	308	0.568
Ceiling	70	45	31	51	0.690
Walls (4)	50	118	42	272	/

Workplane:

Height: 0.750 m
Grid: 64 x 32 Points
Boundary Zone: 0.500 m

UGR

Lengthways-
Left Wall 16
Lower Wall 15
(CIE, SHR = 1.00.)

Across to luminaire axis

16
15

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.388, Ceiling / Working Plane: 0.145.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ [lm]	P [W]
1	4	ENLIT spol. s r.o. @430mA BASIC LED gen.4 SUR 43W DMP 1200x300 (Type 1)* (1.000)	4400	43.0

*Modified Technical Specifications

Total: 17600 172.0

Specific connected load: 4.50 W/m² = 1.45 W/m²/100 lx (Ground area: 38.25 m²)