


Operator  
Telephone  
Fax  
e-Mail

**Room 1 / Summary**

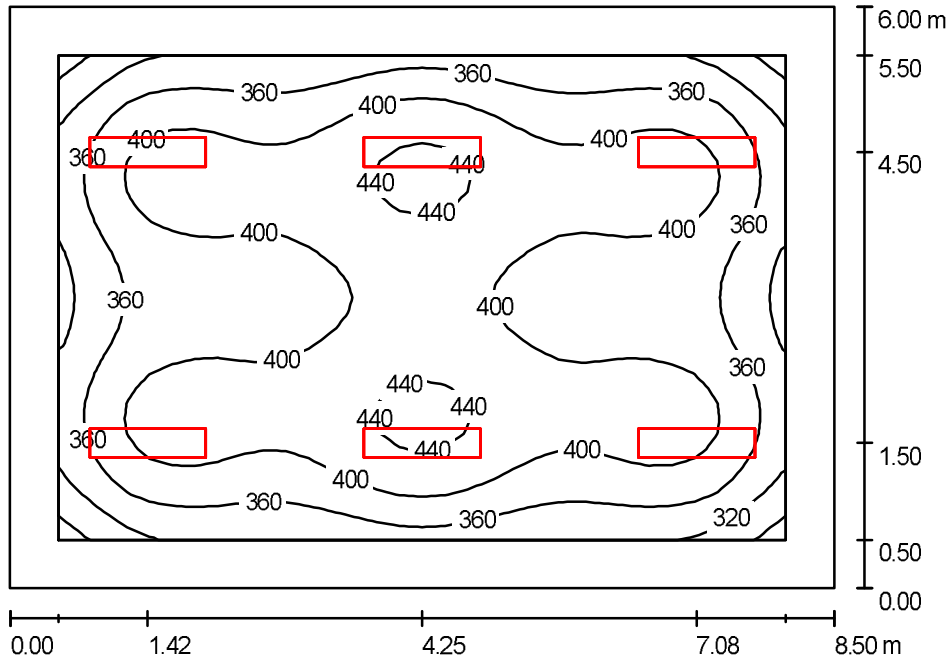

Height of Room: 3.300 m, Mounting Height: 3.300 m, Maintenance factor: 0.80

Values in Lux, Scale 1:78

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	386	265	453	0.686
Floor	20	317	173	394	0.545
Ceiling	70	71	50	81	0.697
Walls (4)	50	159	65	256	/

**Workplane:**

Height: 0.750 m  
Grid: 32 x 32 Points  
Boundary Zone: 0.500 m

**UGR**

Left Wall  
Lower Wall  
(CIE, SHR = 1.00.)

**Lengthways-**

16  
17

**Across**

16  
16

**to luminaire axis**

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.409, Ceiling / Working Plane: 0.184.

**Luminaire Parts List**

No.	Pieces	Designation (Correction Factor)	$\Phi$ [lm]	P [W]
1	6	ENLIT spol. s r.o. @430mA BASIC LED gen.4 SUR 43W DMP 1200x300 (1.000)	4500	43.0

Total: 27000 258.0

Specific connected load: 5.06 W/m<sup>2</sup> = 1.31 W/m<sup>2</sup>/100 lx (Ground area: 51.00 m<sup>2</sup>)